


AC004S

Safety monitor/2 ch. enhan.

Bus system AS-Interface

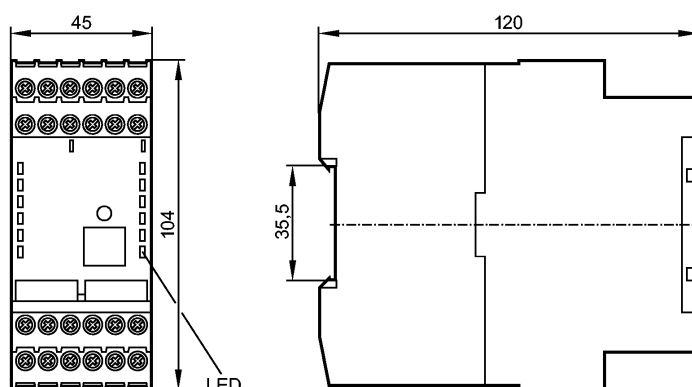

Made in Germany

Product characteristics

AS-i safety monitor

Screw terminal

Extended functionality

2-channel

Configuration and setup by configuration software ASIMON

Complies with the requirements:

EN ISO 13849-1: PL e

IEC 61508: SIL 3

Electrical data

Electrical design	2 safety-related outputs
Operating voltage [V]	24 DC $\pm$ 15%
Total current consumption from AS-i [mA]	< 45
Current consumption from 24 V DC [mA]	150
Rated operating current [mA]	200
Peak switch-on current **) [mA]	600
Overvoltage category	3, for rated operating voltage 300 V AC to VDE 0110 part 1

Inputs

Inputs	start input: optocoupler input (high active), input current approx. 10 mA (24 V DC) contactor control input (EDM): optocoupler input (high active), input current approx. 10 mA (24 V DC)
--------	---

Outputs

Message output Safety ON ***)	PNP transistor output/ 200 mA / reverse polarity and short-circuit protection
Safety output	2 volt-free NO contacts max. contact load: 1 A DC-13 (24 V DC) / 3 A AC-15 (230 V AC) continuous thermal current: 3 A per output circuit

Interfaces

Configuration interface	9600 baud / no parity / 1 start bit / 1 stop bit / 8 data bits
-------------------------	--

Environment

Ambient temperature [°C]	-20...60
Storage temperature [°C]	-30...70

AC004S

Safety monitor/2 ch. enhan.

Bus system AS-Interface

Protection	IP 20 *)
------------	----------

Tests / approvals

EMC	EN 50081-2 (1993)
	EN 61000-6-2 (1999)
	EN 60947-5-1 (2000)
	EN 60204-1

Safety classification

Mission time TM [h]	175200, (20 years)
PFD	6.1 x 10E-5
PFH	9.1 x 10E-9

AS-i classification

AS-i profile	7.F
I/O configuration [hex]	7
ID code [Hex]	F
AS-i certificate	in preparation

Mechanical data

Housing materials	polyamide black
Weight [kg]	0.418

Electrical connection

Wiring

AS-i +: connection AS-i bus

AS-i -: connection AS-i bus

L+: +24V DC supply

M: GND reference earth

FE: functional earth

1.Y1: EDM 1 Input feedback circuit / output circuit 1

1.Y2: start / start input Output circuit 1

1.13: Output switching element 1 Output circuit 1

1.14: Output switching element 1 Output circuit 1

1.23: Output switching element 2 Output circuit 1

1.24: Output switching element 2 Output circuit 1

1.32: Safety ON / signal output 1 Output circuit 1

2.Y1: EDM 2 Input feedback circuit / output circuit 2

2.Y2: start / start input EDM 2 Output circuit 2

2.13: Output switching element 1 Output circuit 2

2.14: Output switching element 1 Output circuit 2

2.23: Output switching element 2 Output circuit 2

2.24: Output switching element 2 Output circuit 2

2.32: Safety ON / signal output 2 Output circuit 2

Remarks

Remarks	*) Only suitable for use in electrical operating rooms or control cabinets with minimum protection rating IP54 **) Simultaneous switch-on of all relays, the current for the message outputs is not taken into consideration ***) The "Safety ON" message output is not relevant to safety
---------	---

Pack quantity [piece]	1
-----------------------	---