


AC041S

Safety Monitor / 2 channel PNP

Bus system AS-Interface

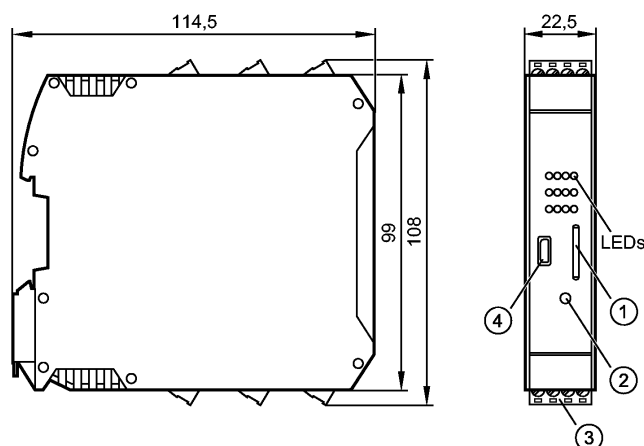

- 1: Chip card
- 2: service button
- 3: Combicon connector with screw terminals
- 4: Micro USB interface



Made in Germany

Product characteristics

AS-i safety monitor

Screw terminal

2 safe semi-conductor outputs

SIL 3 to EN 62061, IEC 61508 /
SIL 3 and EN ISO 13849 - 1 / PL e

Chip card to save the configuration data

Configuration and setup by configuration software ASIMON V3 G2

USB 2.0 interface

Chip card and Combicon screw terminals supplied with the device

Electrical data

Operating voltage [V] 24 DC

Outputs

Max. current load per output [mA] 0.5

Semi-conductor outputs 2

Environment

Ambient temperature [°C] 0...55

Protection IP 20

AS-i classification

AS-i profile S-7.5.5

I/O configuration [hex] 7

ID code [Hex] 5.5

AS-i interface 1

Mechanical data

service button yes

Weight [kg] 0.232

Electrical connection

Connection Combicon connector with screw terminals

Accessories

**AC041S**

Safety Monitor / 2 channel PNP

Bus system AS-Interface

Accessories (included)	Chip card; Combicon connector with screw terminals
------------------------	--

Remarks

Pack quantity	[piece]	1
---------------	---------	---

ifm electronic gmbh • Friedrichstraße 1 • 45128 Essen — We reserve the right to make technical alterations without prior notice. — GB — AC041S — 06.03.2012