


**AC1376**

AS-i DP Gateway M4 2MSTR

Bus system AS-Interface

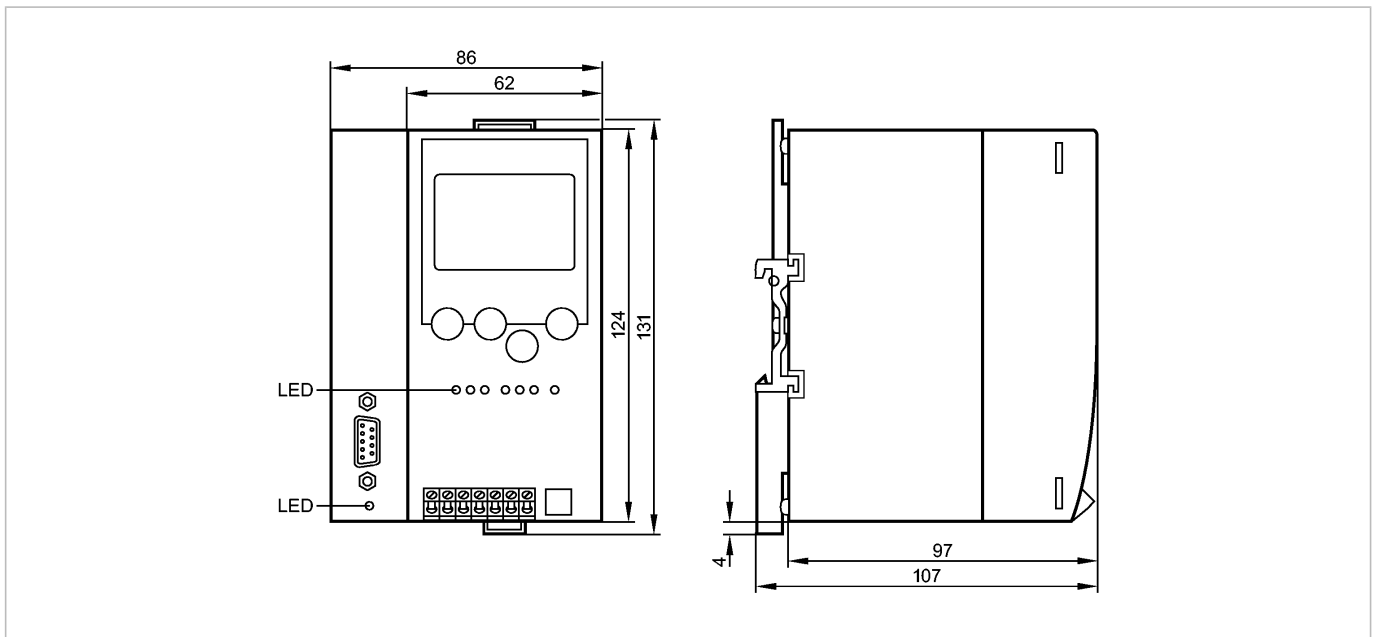

Made in Germany



**Product characteristics**

AS-i DP gateway	
Housing for DIN rail mounting	
Profibus DP interface	
Full master functions	
Graphic display	

**Application**

Application	Use as Profibus DP gateway with 2 AS-i masters
-------------	--

**Electrical data**

Number of AS-i masters	2
Operating voltage [V]	24 DC
Total current consumption from AS-i [mA]	< 10
Current consumption from 24 V DC [mA]	< 400
Power consumption [VA]	< 10
Insulation rating [V]	500
Electrical separation	yes

**Interfaces**

Diagnosis via Profibus DP	yes
Data interface	Profibus-DP; max. 12M Baud; EN 50170

**Environment**

Ambient temperature [°C]	0...60
Storage temperature [°C]	-20...70
Protection	IP 20

**AS-i classification**

AS-i version	2.1 + 3.0
AS-i profile	M4
AS-i certificate	in preparation



## AC1376

AS-i DP Gateway M4 2MSTR

Bus system AS-Interface

### Mechanical data


Housing materials	aluminium; steel sheet galvanised
Weight [kg]	0.55

### Displays / operating elements

Display	full graphic LCD display
Operation LED	3 x red; 3 x green; 2 x yellow

### Electrical connection

#### Wiring



### Remarks

Pack quantity [piece]	1
-----------------------	---