


MR0101

MRT2021BAKOA/R/0.3M/ZH/AS

Magnetic sensors, cylinder sensors

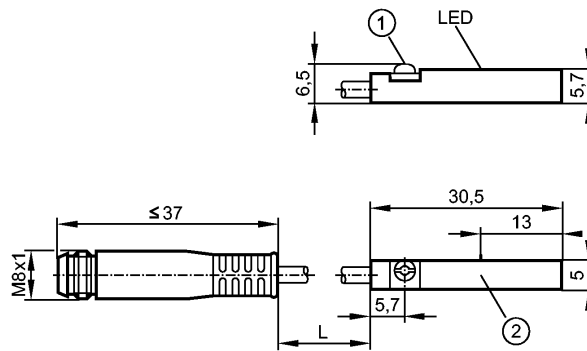

1: Fastening clamp
2: sensing face

Made in Germany



Product characteristics	
Cylinder sensor with reed contact	
Plastic housing for T-slot cylinders	
Cable with connector	
[f] flush mountable	
Magnetic sensitivity 2.1 mT	
Travel speed > 10 m/s	
Electrical data	
Electrical design	AC/DC PNP/NPN
Operating voltage [V]	5...60 DC / 5...50 AC; (for UL supply class 2: 5...60 DC / 5...30 AC)
Protection class	III
Reverse polarity protection	yes
Outputs	
Output function	normally open
Voltage drop [V]	< 5
Current rating [mA]	100 *)
Short-circuit proof	no
Overload protection	no
Switching frequency [Hz]	1000
Switching power (max.) [W]	10
Range	
Magnetic sensitivity [mT]	2.1
Travel speed [m/s]	> 10
Accuracy / deviations	
Hysteresis [mm]	1
Repeatability [mm]	± 0.2
Reaction times	
Fall time [ms]	≤ 0.1
Make time incl. bounce [ms]	≤ 0.6
Environment	
Ambient temperature [°C]	-25...70
Protection	IP 67
Tests / approvals	



MR0101

MRT2021BAKOA/R/0.3M/ZH/AS

Magnetic sensors, cylinder sensors

EMC	EN 61000-4-2 ESD: - CD / 8 kV AD EN 61000-4-3 HF radiated: 10 V/m (80...2000 MHz) EN 61000-4-4 Burst: 2 kV EN 61000-4-5 Surge: 1 kV (line to line, Ri: 2Ohm) EN 61000-4-6 HF conducted: 10 V (0.15...80 MHz) EN 55011: class B
MTTF [Years]	11303

Mechanical data

Mounting	flush mountable
Housing materials	housing: PA (polyamide); Fastening clamp: stainless steel
Switching cycles when connected to PLC [million]	≤ 40
Weight [kg]	0.012



Displays / operating elements

Output status indication	LED	yellow
--------------------------	-----	--------

Electrical connection

Connection	PUR cable / 0.3 m; with M8 connector (snap-fit)
------------	---

Wiring



Note: miniature fuse to IEC60127-2 sheet 1, ≤ 0.175 A (fast acting)

Accessories

Accessories (included)	rubber placeholder; cable clip
------------------------	--------------------------------

Remarks

Remarks	*) External protective circuit for inductive load (valve, contactor, etc.) necessary. Clamping screw with combined slot/hexagon socket head AF 1.5 No LED function in case of polarity reversal in DC operation. UL - Class 2 source required
---------	--

Pack quantity [piece]	1
-----------------------	---