


O6P301

O6P-FPKG/0.30m/US

Photoelectric sensors



- 1: output function switch
- 2: potentiometer sensitivity

Made in Germany



Product characteristics

Retro-reflective sensor
Rectangular Metal
Cable with connector
Polarisation filter
adjustable
Sensing range 0.05...5m (Prismatic reflector Ø 80 (E20005))

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...30 DC
Current consumption [mA]	20 (24 V)
Type of light	Red light 633 nm
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	light-on/dark-on mode selectable
Voltage drop [V]	< 2.5
Current rating [mA]	100
Short-circuit protection	pulsed
Switching frequency [Hz]	1000

Range

Sensing range [m]	0.05...5 (Prismatic reflector Ø 80 (E20005))
Light spot diameter [mm]	150 (at maximum range)


Excess gain graphs

x: distance in [mm]
y: excess gain factor

O6P301

O6P-FPKG/0.30m/US

Photoelectric sensors

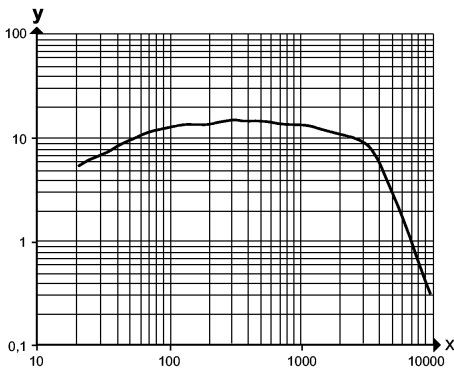

Environment

Ambient temperature	[°C]	-25...80
Protection		IP 65 / IP 67 ; IP 68 / IP 69K

Tests / approvals

EMC		EN 60947-5-2
MTTF	[Years]	908
UL approval number		E006

Mechanical data

Housing materials		housing: stainless steel 316L / 1.4404; plastics: PPSU
Lens material		PMMA
Weight	[kg]	0.053


Displays / operating elements

Output status indication	LED	yellow
Operation	LED	green

Electrical connection

Connection		PVC cable / 0.3 m; 4 x 0.25 mm ² ; with M12 connector
------------	--	--

Wiring



Remarks

Remarks		UL - Class 2 source required
Pack quantity	[piece]	1