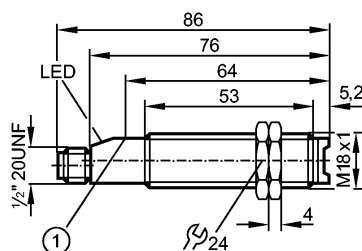


OG0039

OGE-DBOA/LS-100-AK

Photoelectric sensors



1: pushbutton



Made in Germany

Product characteristics

Through-beam sensor

Threaded type

M18 x 1

Connector

Receiver

Sensing range 15m

adjustable

Electrical data

Electrical design	AC/DC
Operating voltage [V]	20...250 AC/DC (47...63 Hz AC)
Type of light	Infrared light 880 nm
Protection class	II
Reverse polarity protection	no

Outputs

Output function	dark-on mode
Voltage drop [V]	< 8
Minimum load current [mA]	5
Leakage current [mA]	< 1.7

Current rating

- Current rating (continuous) [mA]	180 (...40 °C) / 90 (...80 °C)
- Current rating (peak) [mA]	î: 0.6 A (20 ms / 0.5 Hz)
Short-circuit proof	no
Overload protection	no
Switching frequency [Hz]	25

Range

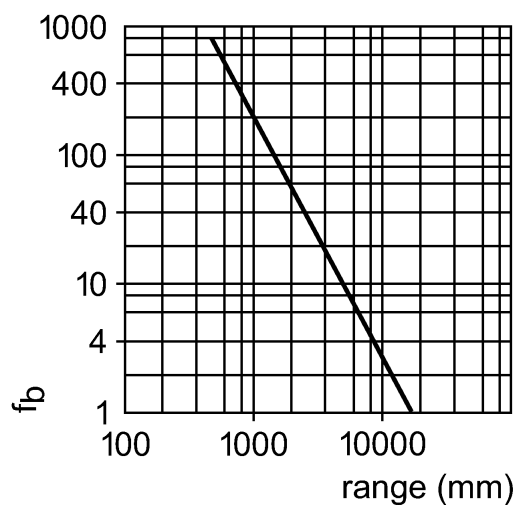
Sensing range [m]	15
-------------------	----

Excess gain graphs

OG0039

OGE-DBOA/LS-100-AK

Photoelectric sensors


Environment

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC		EN 60947-5-2 EN 55011:	class B
MTTF	[Years]		334

Mechanical data



Housing materials		PBT
Lens material		PMMA
Weight	[kg]	0.045

Displays / operating elements

Output status indication	LED	red (permanently lit)
Function display	LED	red (flashing)

Electrical connection

Connection		1/2" connector
------------	--	----------------

Wiring


Note: miniature fuse to IEC60127-2 sheet 1,
≤ 2 A (fast acting)

Accessories

Accessories (included)		2 lock nuts
------------------------	--	-------------

Remarks

Remarks		Recommendation: check the unit for reliable function after a short circuit.
---------	--	---

Pack quantity	[piece]	1
---------------	---------	---