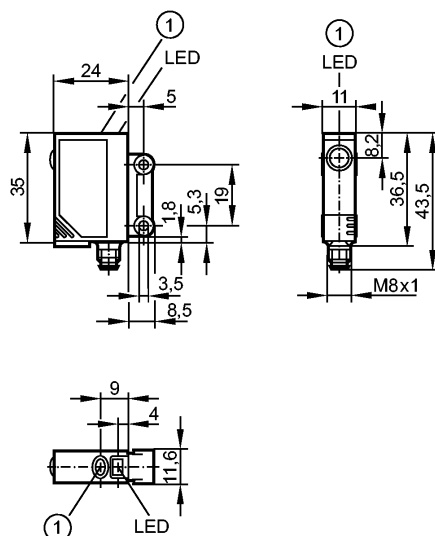


OJ5136

OJPLFPKG/SO/AS

Photoelectric sensors


1: pushbutton

Made in Germany


Product characteristics

Retro-reflective sensor

Rectangular, plastics

Connector

Electronic lock

Retro-reflective LASER sensor

Polarisation filter

Visible laser light, LASER CLASS 1

External teach function

Side sensing

Sensing range 8m (Prismatic reflector 50 x 50 mm (E20722))

adjustable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...30 DC
Current consumption [mA]	< 15
Type of light	Red light 650 nm
Life expectancy typ. [h]	50000
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	light-on / dark-on programmable
Voltage drop [V]	< 2.5
Current rating [mA]	200
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	2000

Range

Sensing range [m]	8 (Prismatic reflector 50 x 50 mm (E20722))
-------------------	---


OJ5136

OJPLFPKG/SO/AS

Photoelectric sensors

Smallest detectable object [Ø in mm]	Ø 2.5mm (0.1m) Ø 4mm (2.5m) Ø 8mm (5m)
Light spot diameter [mm]	< 12 (at maximum range)

Excess gain graphs

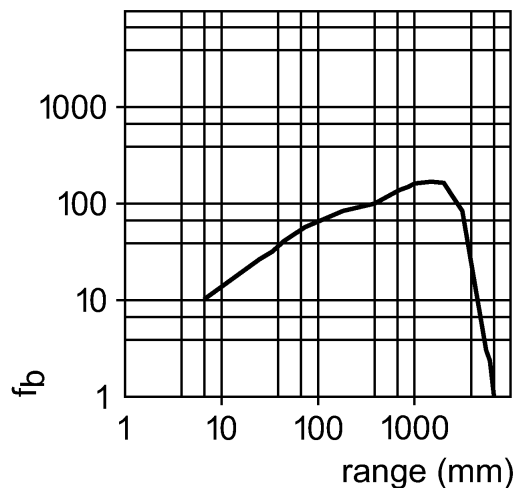

Environment	
Ambient temperature [°C]	-10...60
Protection	IP 67


Tests / approvals	
EMC	EN 60947-5-2
MTTF [Years]	697

Mechanical data	
Housing materials	housing: ABS; LED window: SEPS; pushbutton: SEPS
Lens material	glass
Weight [kg]	0.042

Displays / operating elements	
Output status indication LED	yellow
Operation LED	green
Function display LED	Red

Electrical connection	
Connection	M8 connector

Wiring



Accessories	
Accessories (included)	2 mounting screws; 2 spring washers; 2 nuts

Remarks	
Remarks	Laser light CLASS 1 LASER PRODUCT IEC 60825-1 : 2007 complies with 21 CFR 1040.10 except for deviations



OJ5136

OJPLFPKG/SO/AS

pursuant to Laser Notice No. 50, dated June 2007
cULus - Class 2 source required

Pack quantity	[piece]	1
---------------	---------	---