


SI0553

SID10ADHFPKG/US-100

Flow sensors

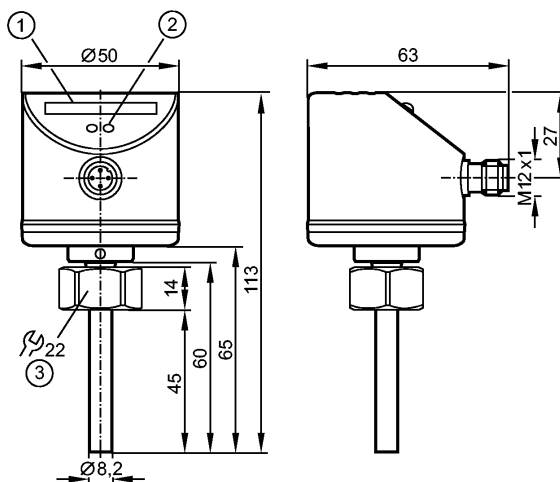

- 1: LED display
2: setting pushbutton
3: tightening torque 25 Nm

Made in Germany


Product characteristics

Flow monitor
Compact type for adapter
Process connection: internal thread M18 x 1.5 for adapter (Hastelloy)
Probe length: 45 mm
Pressure rating: 300 bar
Setting range: 3...300 cm/s (liquids)

Application

Application	liquids and gases
Medium temperature [°C]	-25...80

Electrical data

Electrical design	DC PNP
Operating voltage [V]	19...36 DC
Current consumption [mA]	< 60
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	normally open / closed programmable
Current rating [mA]	250
Voltage drop [V]	< 2.5
Short-circuit protection	pulsed
Overload protection	yes


Measuring / setting range

Liquids	
Setting range [cm/s]	3...300
Greatest sensitivity [cm/s]	3...100
Gases	
Setting range [cm/s]	200...3000
Greatest sensitivity [cm/s]	200...800

SI0553

SID10ADHFPKG/US-100

Flow sensors

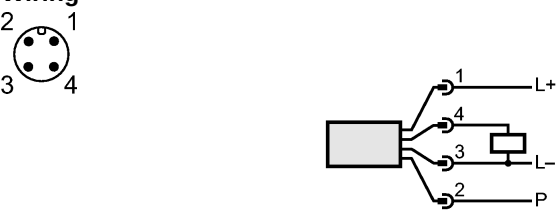Accuracy / deviations		
Switch point accuracy	[cm/s]	± 2...± 10 *)
Hysteresis	[cm/s]	2...5 *)
Repeatability	[cm/s]	1...5 *)
Temperature drift	[cm/s x 1/K]	0.1 **)
Max. temperature gradient of medium	[K/min]	300
Reaction times		
Power-on delay time	[s]	10
Response time	[s]	1...2 ***) / 1...10 ****)
Software / programming		
Adjustment of the switch point	pushbuttons	
Environment		
Pressure rating	[bar]	300
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-25...100
Protection	IP 67	
Tests / approvals		
EMC	EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst: EN 61000-4-6 HF conducted:	4 kV CD / 8 kV AD 10 V/m 2 kV 10 V
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6:	20 g (55...2000 Hz)
MTTF	[Years]	298
Mechanical data		
Process connection	internal thread M18 x 1.5 for adapter (Hastelloy)	
Materials (wetted parts)	Hastelloy C-4 (2.4610); O-ring: FKM 8 x 1.5 gr 80° Shore A	
Housing materials	stainless steel 316L / 1.4404; stainless steel / 301 / 1.4310; PC (polycarbonate); PBT-GF 20; EPDM/X	
Probe length L	[mm]	45
Weight	[kg]	0.256
Displays / operating elements		
Function display	LED	10 LEDs, three-colour
Electrical connection		
Connection	M12 connector	
Wiring		
		
P = programming wire (for remote adjustment)		
Remarks		
Remarks	*) for water; 5...100 cm/s; 25°C (factory setting)	

SI0553

SID10ADHFPKG/US-100

Flow sensors

**) for water; 5...100 cm/s; 10...70°C

***) for liquids and temperature gradient 1 K/min

****) for gases

Pack quantity [piece]

1