

OYA1060-14-4-05-P-1-B

Photoelectric sensors

[illegible]

T: Transmitter
R: Receiver
1: LED (yellow)
2: LED (red)
3: 7-segment LED display
4: LED (green)
5: LED (yellow)
6: LED (red)
7: 7-segment LED display
8: LED (green)

OY807S

OYA1060-14-4-05-P-1-B

Photoelectric sensors


Product characteristics

Safety light curtain

Length L: 1161 mm

Connector

with floating blanking

Complies with the requirements:

type 4 (IEC 61496-1)

SIL 3 (IEC 61508)

SILcl 3 (IEC 62061)

PL e (EN ISO 13849-1)

Electrical data

Electrical design	DC PNP
Operating voltage [V]	24 DC (19.2...28.8)
Current consumption	
- Transmitter [mA]	83
- Receiver [mA]	125
Type of light	Infrared light 950 nm
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 18

Outputs

Outputs (OSSDs)	2 x PNP
Max. current load per output [mA]	500 (24 V)
Short-circuit protection	yes

Range

Protected area height [mm]	1060
Resolution (detection capacity d)[mm]	14
Protected area width (range) [m]	0...3 / 0...5

Reaction times

Response time [ms]	17
--------------------	----

Environment

Applications	Class C to EN 60654-1 weatherproof application
Ambient temperature [°C]	0...55
Max. relative air humidity [%]	95
Protection	IP 65

Tests / approvals

EMC	IEC 61496-1
Shock resistance	IEC 61496-1
Vibration resistance	IEC 61496-1

Safety classification

Mission time TM [h]	175200
Safety-related reliability PFHd [1/h]	1.9 E -08
MTTFd [Years]	82

OY807S

OYA1060-14-4-05-P-1-B

Photoelectric sensors

DC/CCF/Cat.	98.6 % / 80 % / 4
-------------	-------------------

Mechanical data

Length L	[mm]	1161
Housing materials	housing: aluminium; window: PC	
Weight	[kg]	5.475


Displays / operating elements

Display	LED yellow LED green LED Red 7-segment LED display
---------	---

Electrical connection


Transmitter	
Connection	M12 connector

Wiring Transmitter

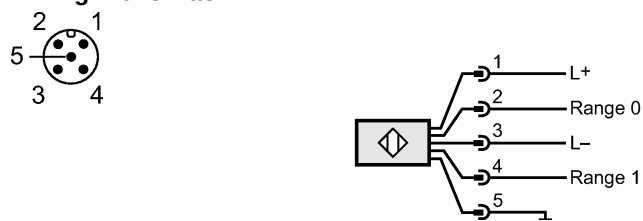

Receiver	
Connection	M12 connector

Wiring Receiver

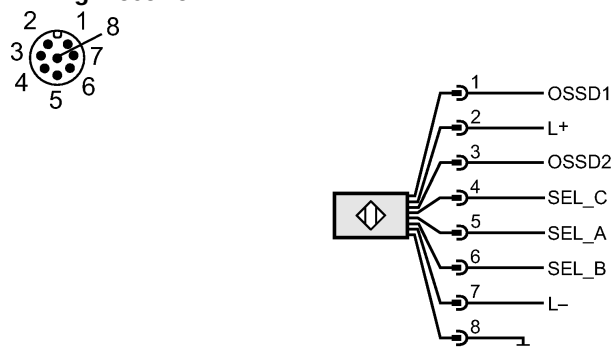

Max. connection cable length	[m]	100 *)
------------------------------	-----	--------

Accessories

Accessories (included)	4 mounting brackets; 4 mounting nuts; screws
------------------------	--

Remarks

Remarks	*) for wire cross-section 0.34 mm²	
Pack quantity	[piece]	1