


GI506S

GIIA-4030-3PT/KAT4/V4A/US

Inductive sensors

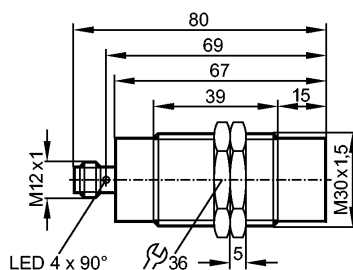

Made in Germany

Product characteristics

Fail-safe inductive sensor

Metal thread M30 x 1.5

M12 connector

Enable zone 6...12 mm; [nf] non-flush mountable

 Complies with the requirements:
 EN ISO 13849-1: 2008 category 4 PL e
 IEC 61508: SIL 3

Application

Type of operation continuous operation (maintenance-free)

Electrical data

Electrical design	DC
Operating voltage [V]	24 DC (19.2...30 DC)
Current consumption [mA]	< 15
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	5

Outputs

Output function	Clock signal
Short-circuit protection	yes

Range

Enable zone [mm]	6...12
Safe switching off distance s(ar)[mm]	30

Reaction times

Response time to safety request[ms]	≤ 20
Response time when approaching the enable zone (enable time) [ms]	≤ 200; typ. 100

Environment

Applications	Class C to EN 60654-1 weatherproof application
Ambient temperature [°C]	0...70, for service life ≤ 87600 h 10...40, for service life ≤ 175200 h
Rate of temperature change [K/min]	0.5
Max. relative air humidity [%]	5...95, briefly 5...70, permanently
Air pressure [kPa]	80...106
Protection	IP 68 / IP 69K; to EN 60529

Tests / approvals

EMC	IEC 60947-5-2
-----	---------------

GI506S

GIIA-4030-3PT/KAT4/V4A/US

Inductive sensors

Shock resistance	IEC 60947-5-2
Vibration resistance	IEC 60947-5-2

Safety classification

Mission time T _M [h]	≤ 175200, (20 years)
Safety-related reliability PFH _d [1/h]	1.1E-09
MTTF _d [Years]	2500
DC/CCF/Cat.	99 % / 65 % / 4

Mechanical data

Mounting	non-flush mountable
Housing materials	PEEK (polyether ether ketone); high-grade stainless steel; O-ring: FPM
Weight [kg]	0.262


Displays / operating elements

Display	LED yellow (signal), LED green (power)
---------	--

Electrical connection

Connection	M12 connector; Gold-plated contacts
------------	-------------------------------------

Wiring

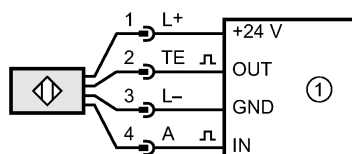

1 = Safety-related logic unit

Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

Remarks

Remarks	Unless stated otherwise, all data refer to the 45x45x1 mm reference target plate to IEC 60947-5-2 (FE360 = mild steel) over the whole temperature range.
---------	--

Pack quantity [piece]	1
-----------------------	---