




IIKC012BASKG/M/6M/ZH

Inductive sensors

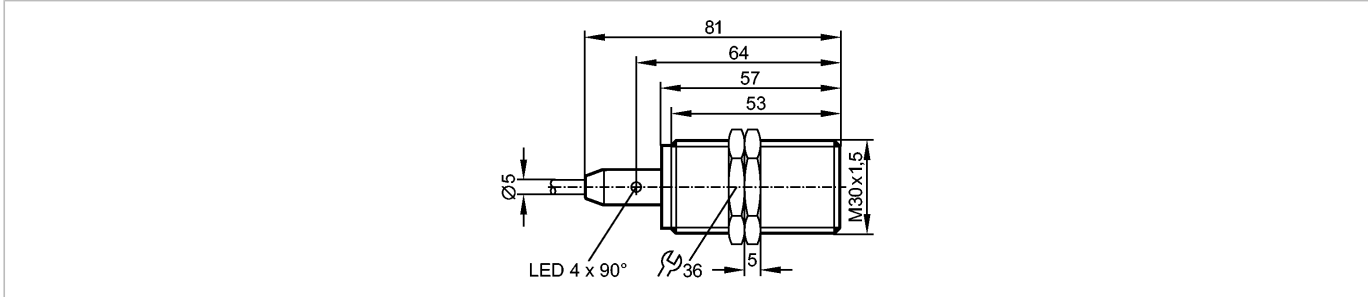

Made in Germany



Product characteristics

Inductive sensor	
Metal thread M30 x 1.5	
Cable	
Increased sensing range	
e1 type approval	
Sensing range 12 mm; [f] flush mountable	
Electrical data	
Electrical design	3-wire DC PNP; 2-wire DC PNP/NPN
Operating voltage [V]	10...36 DC
Current consumption [mA]	< 10; only in 3-wire operation
Protection class	II
Reverse polarity protection	yes
Outputs	
Output function	normally open
Voltage drop [V]	< 2.5
Minimum load current [mA]	> 2; only in 2-wire operation
Leakage current [mA]	< 0.5
Current rating [mA]	100
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	100
Range	
Sensing range [mm]	12
Operating distance [mm]	0...9.72
Accuracy / deviations	
Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.5 / aluminium approx. 0.45 / Cu approx. 0.4
Hysteresis [% of Sr]	1...20
Environment	
Ambient temperature [°C]	-40...85
Protection	IP 67 / IP 69K

Tests / approvals

EMC

Automotive area	
Noise emission and noise interference according to the automotive directive 95/54/EC (e1 type approval)	
Noise interference according to DIN ISO 11452-2: 100 V/m	
Conducted interference according to ISO 7637-2	
Pulse	1 2 3a 3b 4 5
Severity level	IV IV IV IV IV IV
Failure criterion	C C A A A C

**IIM202 - Inductive sensor - eclass: 27270101 / 27-27-01-01**

	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 10 V/m (80...2000 MHz) EN 61000-4-4 Burst: 2 kV EN 61000-4-5 Surge: 0.5 kV (line to line, Ri: 20hm) EN 61000-4-6 HF conducted: 10 V (0.15...80 MHz) EN 55011: class B
Environmental Inspection Rating	Vibration Test (EN 60068-2-6 Fc): 20 g acceleration; from 10 to 3000 Hz at -20 °C and 50 °C; 50 cycles per frequency; 1 octave per minute in each of 3 mutually perpendicular axes.  Shock Test (EN 60068-2-27 Ea): 100 g acceleration; 11 ms half sine wave pulse shape with 3 shocks in each direction along the three coordinate axis at -40 °C and 85 °C.  Continuous Shock Test (EN 60068-2-29 Eb): 40 g acceleration; 6 ms with 4000 shocks in any direction along the 3 coordinate axis at -20 °C and 50 °C.  Rapid Temperature Change Test (EN 60068-2-14 Na): Sensor is alternately put in -40 °C environment for 30 minutes and 85 °C environment for 30 min. The transfer between environments must occur in less than 10 seconds. Test is repeated for 50 cycles.  Salt Spray Test (EN 60068-2-52 Kb): Severity level 5 (4 test cycles)
MTTF [Years]	1101
Mechanical data	
Mounting	flush mountable
Housing materials	housing: stainless steel; active face: PBT; LED window: PEI; lock nuts: Brass
Weight [kg]	0.379
Displays / operating elements	
Output status indication LED	yellow (4 x 90°)
Electrical connection	
Connection	PUR cable / 6 m; 3 x 0.5 mm <sup>2</sup> ; Ø 5.4 mm
<b>Wiring</b>	
Core colours	
BK black	
BN brown	
BU blue	
Accessories	
Accessories (included)	2 lock nuts
Remarks	
Remarks	** ) only in 3-wire operation
Pack quantity [piece]	1