


O6T301

O6T-FPKG/0.30m/US

Photoelectric sensors



- 1: output function switch
- 2: potentiometer sensitivity

Made in Germany



Product characteristics

Diffuse reflection sensor

Rectangular Metal

Cable with connector

adjustable

Range 5...500mm (Range referred to white paper 200 x 200 mm, 90 % remission)

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...30 DC
Current consumption [mA]	20 (24 V)
Type of light	Red light 633 nm
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	light-on/dark-on mode selectable
Voltage drop [V]	< 2.5
Current rating [mA]	100
Short-circuit protection	pulsed
Switching frequency [Hz]	1000

Range

Range [mm]	5...500 (Range referred to white paper 200 x 200 mm, 90 % remission)
Light spot diameter [mm]	15 (at maximum range)


Excess gain graphs

x: distance in [mm]
y: excess gain factor

O6T301

O6T-FPKG/0.30m/US

Photoelectric sensors

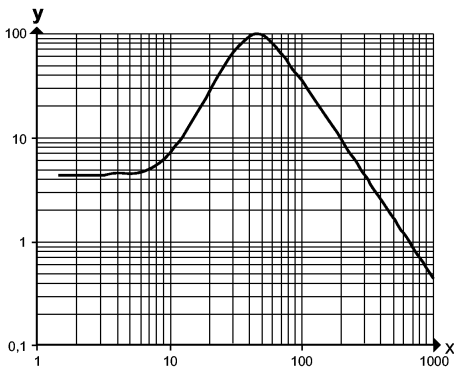

Measuring / setting range

Setting range	[mm]	100...500
---------------	------	-----------

Environment

Ambient temperature	[°C]	-25...80
Protection		IP 65 / IP 67 ; IP 68 / IP 69K

Tests / approvals

EMC		EN 60947-5-2
MTTF	[Years]	910
UL approval number		E006

Mechanical data

Housing materials		housing: stainless steel 316L / 1.4404; plastics: PPSU
Lens material		PMMA
Weight	[kg]	0.053


Displays / operating elements

Output status indication	LED	yellow
Operation	LED	green

Electrical connection

Connection		PVC cable / 0.3 m; 4 x 0.25 mm ² ; with M12 connector
------------	--	------------------------------------------------------------------

Wiring



Remarks

Remarks		UL - Class 2 source required
Pack quantity	[piece]	1