


SI5007

SID10ADBFPKG/US-100

Flow sensors

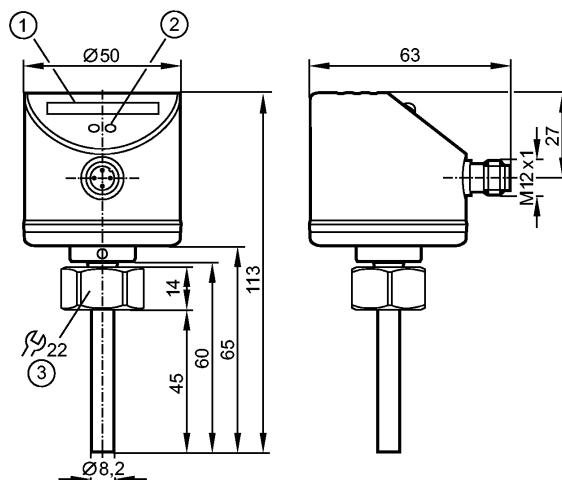

- 1: LED display
2: setting pushbutton
3: tightening torque 25 Nm

Made in Germany


Product characteristics

Flow monitor
Compact type for adapter
Process connection: internal thread M18 x 1.5 for adapter
Probe length: 45 mm
2 switching outputs
S1: flow monitoring S2: temperature monitoring
Setting range: 3...300 cm/s (liquids)

Application

Application	liquids and gases
Medium temperature [°C]	-25...80

Electrical data

Electrical design	DC PNP
Operating voltage [V]	19...36 DC
Current consumption [mA]	< 60
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	2 x normally open / closed programmable
Current rating [mA]	2 x 250
Voltage drop [V]	< 2.5
Short-circuit protection	pulsed
Overload protection	yes

Measuring / setting range

Liquids	
Setting range [cm/s]	3...300
Greatest sensitivity [cm/s]	3...100
Gases	

SI5007

SID10ADBFPKG/US-100

Flow sensors

Setting range	[cm/s]	200...3000
Greatest sensitivity	[cm/s]	200...800
Temperature monitoring		
Setting range	[°C]	2...80

Accuracy / deviations

Switch point accuracy	[cm/s]	$\pm 2... \pm 10$ *)
Hysteresis	[cm/s]	2...5 *)
Repeatability	[cm/s]	1...5 *)
Temperature drift	[cm/s x 1/K]	0.1 **)
Max. temperature gradient of medium	[K/min]	300
Temperature monitoring		
Switch point accuracy	[K]	± 3 (v > 5cm/s) ***)
Hysteresis	[K]	2
Repeatability	[K]	± 2
Response time temperature (typ.)	[s]	5
Resolution	[K]	1

Reaction times

Power-on delay time	[s]	10
Response time	[s]	1...10

Software / programming

Adjustment of the switch point	pushbuttons
--------------------------------	-------------

Environment

Pressure rating	[bar]	300
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-25...100
Protection		IP 67

Tests / approvals

EMC	EN 61000-4-2 ESD:	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated:	10 V/m
	EN 61000-4-4 Burst:	2 kV
	EN 61000-4-6 HF conducted:	10 V
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6:	20 g (55...2000 Hz)
MTTF	[Years]	277

Mechanical data

Process connection	internal thread M18 x 1.5 for adapter	
Materials (wetted parts)	stainless steel 316L / 1.4404; O-ring: FKM 8 x 1.5 gr 80° Shore A	
Housing materials	stainless steel 316L / 1.4404; stainless steel / 301 / 1.4310; PC (Makrolon); PBT-GF 20; EPDM/X (Santoprene)	
Probe length L	[mm]	45
Weight	[kg]	0.256

Displays / operating elements

Function display	LED	10 LEDs, three-colour
------------------	-----	-----------------------

Electrical connection

Connection	M12 connector
------------	---------------


SI5007

SID10ADBFPKG/US-100

Flow sensors

Wiring

S1: flow monitoring
S2: temperature monitoring



Remarks

Remarks	*) for water; 5...100 cm/s; 25°C (factory setting) **) for water; 5...100 cm/s; 10...70°C ***) liquids
---------	--

Pack quantity	[piece]	1
---------------	---------	---